




APPLICATION

OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE, SUPERMARKE,
UNIVERSITY, GOVERNMENT BUILDING, FACTORY, SUPERMARKET,
HOTEL, RESIDENTIAL, SHOWROOM

SPECIFICATION

- HOUSING : ○ MADE OF COLD-ROLLED STEEL SHEET
 ○ SIX-STAGES ZINC-PHOSPHATE AND ANTI-RUST
 ○ FINISHED WITH POLYESTER POWDER COAT
- REFLECTOR : ○ MIRROR ANODIZED ALUMINIUM REFLECTOR 87%
 ○ MIRROR ANODIZED ALUMINIUM REFLECTOR 95% *
- DIFFUSER ○ CLEAR ACRYLIC, OPAL ACRYLIC, PRISMATIC ACRYLIC
 ○ OR STIPPLE ACRYLIC
- LAMPHOLDER : ○ G13 AND G5 ROTARY SPRING-LOCKED HIGH HEAT
 ○ RESISTANCE POLYCARBONATE BODY
 ○ G13 SPRING LOAD LOCKED HIGH HEAT RESISTANT
 ○ POLYCARBONATE BODY *
- WIRES : ○ THW 0.5 mm² STANDARD (1mm² on request)

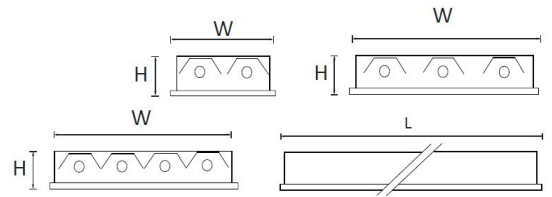

* AC = CLEAR ACRYLIC AP= OPAL ACRYLIC AA=PRISMATIC ACRYLIC

INSTALLATION RECESS CONCEAL CEILING

PRODUCT CODE	LAMP HOLDER	LAMP TYPE	WATT [FUL]	WATT [LED]	CUT OUT W X L [mm.]	DIMENSION W X L X H [mm.]
<input type="checkbox"/> 3R-118S-AC8	G13	T8	1 x 18 W	1 x 9 W	160 x 615	180 x 640 x 90
<input type="checkbox"/> 3R-118L-AC8	G13	T8	1 x 18 W	1 x 9 W	270 x 615	293 x 635 x 90
<input type="checkbox"/> 3R-218S-AC8	G13	T8	2 x 18 W	2 x 9 W	270 x 615	293 x 635 x 90
<input type="checkbox"/> 3R-218L-AC8	G13	T8	2 x 18 W	2 x 9 W	575 x 615	593 x 635 x 90
<input type="checkbox"/> 3R-318L-AC8	G13	T8	3 x 18 W	3 x 9 W	575 x 615	593 x 635 x 90
<input type="checkbox"/> 3R-136S-AC8	G13	T8	1 x 36 W	1 x 18 W	160 x 1225	173 x 1250 x 90
<input type="checkbox"/> 3R-136L-AC8	G13	T8	1 x 36 W	1 x 18 W	270 x 1225	293 x 1250 x 90
<input type="checkbox"/> 3R-236S-AC8	G13	T8	2 x 36 W	2 x 18 W	270 x 1225	293 x 1250 x 90
<input type="checkbox"/> 3R-236L-AC8	G13	T8	2 x 36 W	2 x 18 W	575 x 1225	593 x 1250 x 90
<input type="checkbox"/> 3T-336L-AC8	G13	T8	3 x 36 W	3 x 18 W	575 x 1225	593 x 1250 x 90
<input type="checkbox"/> 3T-436L-AC8	G13	T8	4 x 36 W	4 x 18 W	575 x 1225	593 x 1250 x 90