




## APPLICATION

OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE, SUPERMARKE,  
UNIVERSITY, GOVERNMENT BUILDING, FACTORY, SUPERMARKET,  
HOTEL, RESIDENTIAL, SHOWROOM



## SPECIFICATION

- HOUSING :     ○ MADE OF COLD-ROLLED STEEL SHEET  
                  ○ SIX-STAGES ZINC-PHOSPHATE AND ANTI-RUST  
                  ○ FINISHED WITH POLYESTER POWDER COAT
- REFLECTOR :   ○ MIRROR ANODIZED ALUMINIUM REFLECTOR 87%  
                  ○ MIRROR ANODIZED ALUMINIUM REFLECTOR 95% \*
- DIFFUSER     ○ CLEAR ACRYLIC, OPAL ACRYLIC, PRISMATIC ACRYLIC  
                  ○ OR STIPPLE ACRYLIC
- LAMPHOLDER : ○ G13 AND G5 ROTARY SPRING-LOCKED HIGH HEAT  
                  ○ RESISTANCE POLYCARBONATE BODY  
                  ○ G13 SPRING LOAD LOCKED HIGH HEAT RESISTANT  
                  ○ POLYCARBONATE BODY \*
- WIRES :       ○ THW 0.5 mm<sup>2</sup> STANDARD (1mm<sup>2</sup> on request)

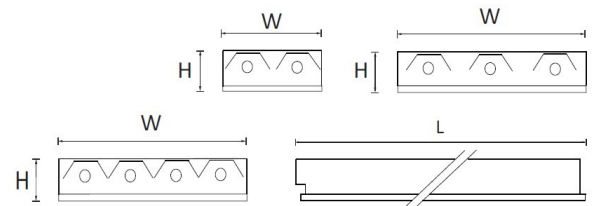

\* AC = CLEAR ACRYLIC AP= OPAL ACRYLIC AA=PRISMATIC ACRYLIC  
INSTALLATION RECESS T-BAR CEILING

PRODUCT CODE	LAMP HOLDER	LAMP TYPE	WATT [FUL]	WATT [LED]	CUT OUT W X L [mm.]	DIMENSION W X L X H [mm.]
<input type="checkbox"/> 3T-118S-AC8	G13	T8	1 x 18 W	1 x 9 W	N/A	180 x 640 x 80
<input type="checkbox"/> 3T-118L-AC8	G13	T8	1 x 18 W	1 x 9 W	N/A	300 x 640 x 80
<input type="checkbox"/> 3T-218S-AC8	G13	T8	2 x 18 W	2 x 9 W	N/A	300 x 640 x 80
<input type="checkbox"/> 3T-218L-AC8	G13	T8	2 x 18 W	2 x 9 W	N/A	597 x 640 x 80
<input type="checkbox"/> 3T-318L-AC8	G13	T8	3 x 18 W	3 x 9 W	N/A	597 x 640 x 80
<input type="checkbox"/> 3T-136S-AC8	G13	T8	1 x 36 W	1 x 18 W	N/A	150 x 1245 x 80
<input type="checkbox"/> 3T-136L-AC8	G13	T8	1 x 36 W	1 x 18 W	N/A	297 x 1245 x 80
<input type="checkbox"/> 3T-236S-AC8	G13	T8	2 x 36 W	2 x 18 W	N/A	297 x 1245 x 80
<input type="checkbox"/> 3T-236L-AC8	G13	T8	2 x 36 W	2 x 18 W	N/A	597 x 1245 x 80
<input type="checkbox"/> 3T-336L-AC8	G13	T8	3 x 36 W	3 x 18 W	N/A	597 x 1245 x 80
<input type="checkbox"/> 3T-436L-AC8	G13	T8	4 x 36 W	4 x 18 W	N/A	597 x 1245 x 80